


GSA® - VGS

This GSA®-Joint is used to transfer high forces and for special geometries. When construction tolerances have to be matched, it often represents the optimal solution. This connection is cast using mortar on the construction site by the n'H TEAM. You simply tell us the compression or tension forces, shear forces or moments and our engineers can calculate the connection.

TOP OF WOOD

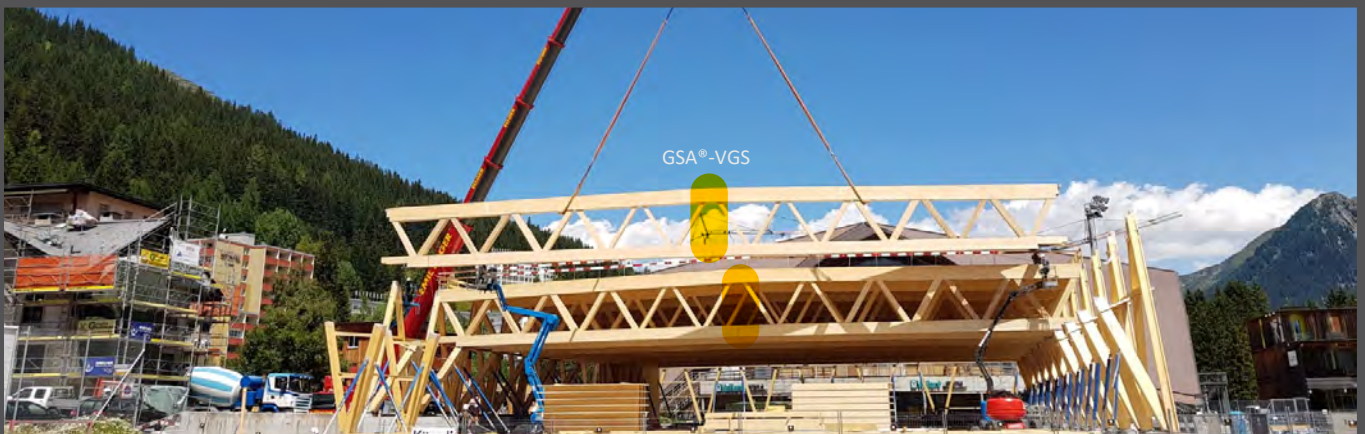

Tel. +41 41 679 70 80
Fax +41 41 679 70 59
holzbau@neueholzbau.ch
www.neueholzbau.ch

n'H
neue Holzbau AG