

In compliance with Regulation 305/2011/EU of the European Parliament and of the Council of 9 March 2011 (the Construction Products Regulation - CPR) this certificate applies to the construction product

GLUED LAMINATED TIMBER (GLULAM)

according to the product specification listed in the current addendum to this certificate placed on the market by

Company

NEUE HOLZBAU AG

Obseestraße 11

CH-6078 Lungern

and produced in the manufacturing plant

CH-6078 Lungern, Obseestraße 11

This certificate attests that all provisions concerning the assessment and verification of constancy of performance described in Annex ZA of the standard

EN 14080:2013

under system 1 for the performance set out in this certificate are applied and that the factory production control conducted by the manufacturer is assessed to ensure the constancy of performance of the construction product.

CERTIFICATE OF CONSTANCY OF PERFORMANCE

Certificate number: 1359-CPR-0668

Date of first issue: 28.01.2016


Date of issuance: 20.08.2019

This certificate will remain valid as long as neither the harmonised standard, the construction product, the AVCP methods nor the manufacturing conditions in the plant are modified significantly, unless suspended or withdrawn by the notified product certification body.

For the validity of this certificate see www.holzforchung.at.



DI Bernhard Kraus
Authorised signatory

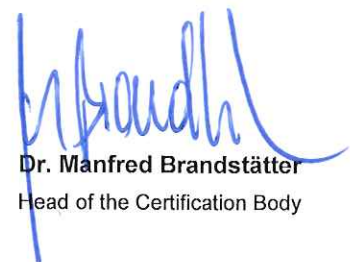

Dr. Manfred Brandstätter
Head of the Certification Body

Annex to Certificate 1359-CPR-0668

Date of issue: 20.08.2019

Scope of certification for the following products:

GLUED LAMINATED TIMBER (GLULAM)

| | |
|-----------------------------------|--|
| Timber species/ strength classes: | PCAB – Fichte: GL 24h, GL 24c, GL 28h, GL 28c, GL 32c und GL 34h |
| Mechanical resistance: | according to EN 14080 |
| Service classes: | 1, 2, 3 |
| Adhesive: | |
| - Finger joints | Type I: PUR according to EN 15425 |
| - Surface bonding | Type I: PUR according to EN 15425 |
| Reaction to fire: | D-s2, d0 |
| Formaldehyde class: | E1 |
| Natural durability class: | according to EN 350-2 |